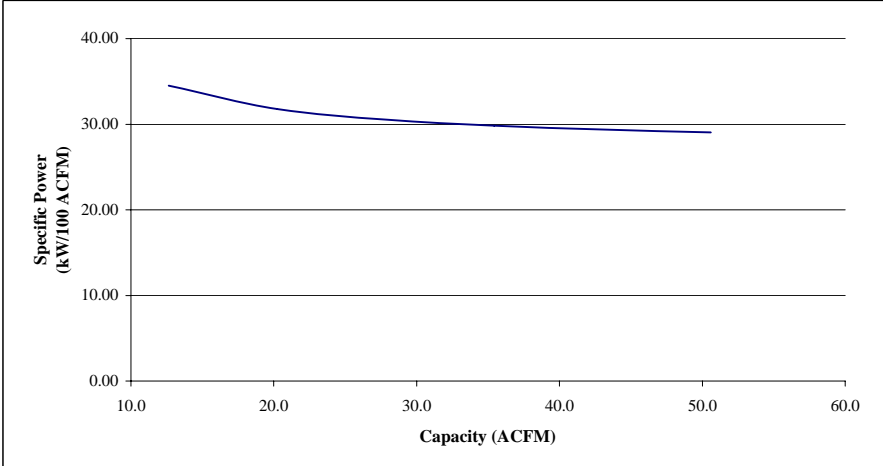


**COMPRESSOR DATA SHEET**  
**Rotary Screw Variable Frequency Drive Compressor**

**MODEL DATA - FOR COMPRESSED AIR**

1	Manufacturer: <b>Sullair Corp</b>		
2	Model Number: <b>1110eV</b>		Date: January 1, 2009
	<b>X</b> Air-cooled	Water-cooled	
	<b>X</b> Oil-injected	Oil-free	# of Stages: <b>1</b>
3	Full Load Operating Pressure	<b>150</b>	psig <sup>b</sup>
4	Maximum Full Flow Operating Pressure	<b>150</b>	psig <sup>c</sup>
5	Drive Motor Nameplate Rating	<b>15</b>	hp
6	Drive Motor Nameplate Efficiency	<b>92.4</b>	percent
7	Fan Motor Nameplate Rating (if applicable)	<b>1</b>	hp
8	Fan Motor Nameplate Efficiency	<b>82.5</b>	percent
9	Input Power (kW)	Capacity (acfm) <sup>a,e</sup>	Specific Power (kW/100 acfm) <sup>e</sup>
	<b>14.7</b>	<b>50.6</b>	<b>29.05</b>
	<b>12.6</b>	<b>43.0</b>	<b>29.37</b>
	<b>10.6</b>	<b>35.4</b>	<b>29.83</b>
	<b>8.5</b>	<b>27.8</b>	<b>30.54</b>
	<b>6.4</b>	<b>20.2</b>	<b>31.77</b>
	<b>4.4</b>	<b>12.7</b>	<b>34.50</b>
10	Total Package Input Power at Zero Flow <sup>d</sup>	<b>0.0</b>	kW
11	 <p align="center">Note: Graph is only a visual representation of the data in Section 9</p>		

NOTES:

Member:

- Measured at the discharge terminal point of the compressor package in accordance with Annex E to ISO 1217; acfm is actual cubic feet per minute at inlet conditions.
- The operating pressure at which the Capacity and Electrical Consumption were measured for this data sheet.
- Maximum pressure attainable at full flow, usually the unload pressure setting for load/no load control or the maximum pressure attainable before capacity control begins. May require additional power.
- No Load Power. In accordance with ISO 1217, Annex E, if measurement of no load power equals less than 1%, manufacturer may state "not significant" or "0" on the test report.
- Tolerance is specified in Annex E to ISO 1217 as follows:  
 NOTE: The terms "power" and "energy" are synonymous for purposes of this document.



Volume Flow Rate at specified conditions		Volume Flow Rate	Specific Energy
<u>m<sup>3</sup> / min</u>	<u>ft<sup>3</sup> / min</u>	%	%
Below 0.5	Below 15	+/- 7	+/- 8
0.5 to 1.5	15 to 50	+/- 6	+/- 7
1.5 to 15	50 to 500	+/- 5	+/- 6
Above 15	Above 500	+/- 4	+/- 5